


## R7560A-ST4000 ACOLAN COPPER

U/UTP Cat.6 400 MHz LSOH 4P DRUM 4000m - IVORY

### APPLICATIONS

- High speed data transmission cables are designed for backbone distribution local computer networks.
- These cables are permitted the protocol supported by the class E.
- They are characterized of up to 400 MHz.
- They are compatibles with PoE & PoE+, UPoE applications.

### GENERAL CHARACTERISTICS

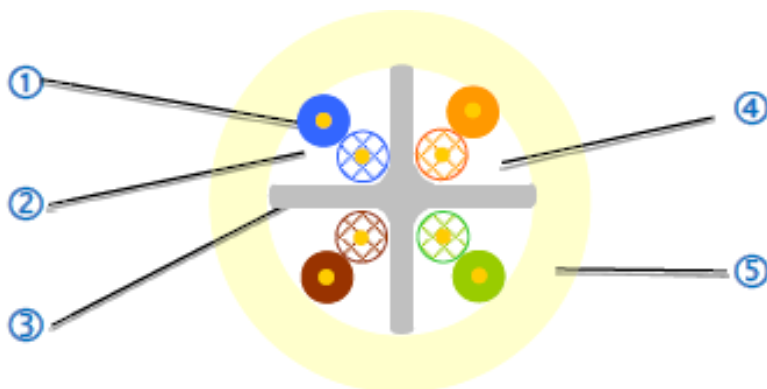

1. Conductor	Solid annealed red copper wire, AWG 24 Colored polyethylene insulation $\pm$ 0.95 mm
2. Cable element	Cable assembly in Twisted Pairs
3. Separator	Symmetrical cross separator
4. Stranding	4 pairs assembly
5. External sheath	LSOH-FR : Low Smoke « Zero » Halogen - Flame Retardant

## GENERAL

Designation ACOLAN	Ref.	Colour	Diameter	Weight	Superior calorific capacity (PCS)		Max pulling tension
			mm	Kg/km	MJ/km	KWh/m	N
400 UU 4P LSOH-FR	R7560A-S	Ivory	5.30	33	394	0.110	90

## MECHANICAL

Characteristics		Values
Bending radius	Dynamic (installation)	$\geq$ 45 mm
	Static (installed)	$\geq$ 23 mm
Temperature range	In service	- 20°C at + 60°C
	At the installation	0°C at + 50°C
	Transport and storage	0°C at + 50°C

## ELECTRICAL

Transmission characteristics at 20° C

Characteristics		Values	
Complete conductor resistance		≤ 190 Ω / km	
Resistance unbalance		≤ 2 %	
Dielectric strength	Continuous current	1kV during 1 minute = No breakdown	
Insulation resistance	(500 V)	≥ 5000 MΩ . km	
Capacitance unbalance	Real-ground	≤ 1600 pF / km	
Characteristic impedance	at 100 MHz	100 ± 5 Ω	
Velocity	nominal	66 %	
Coupling attenuation		≥ 40 dB	TYPE 3
Segregation classification acc. to EN 50174-2		"b"	

Frequency (MHz)										Attenuation (dB/100m)	Typical value	3.7	5.8	8.4	15.0	19.2	31.5	34.5	42	
		4	10	20	62.5	100	250	300**	450**											
Imposition (max)*	3.8	6	8.5	15.5	19.9	33	-	-												
Next (dB)	Typical value	69	63	59	51	48	42	41	38											
	Imposition (min)*	65.3	59.3	54.8	47.4	44.3	38.3	-	-											
ACR (dB)	Typical value	65.3	57.2	50.6	36	28.8	10.5	6.5												
	Imposition (min)*	61.5	53.3	46.3	31.9	24.4	5.3	-												
PS Next (dB)	Typical value	66	60	56	48	45	39	38	35											
	Imposition (min)*	63.3	57.3	52.8	45.4	42.3	36.3	-	-											
ELFEXT (dB/100 m)	Typical value	73	65	59	49	45	37	35	32											
	Imposition (min)*	58	50	44	34.1	30	22	-	-											
PS ELFEXT (dB/100 m)	Typical value	70	62	56	46	42	34	32	29											
	Imposition (min)*	55	47	41	31.1	27	19	-	-											
Return Loss (dB)	Typical value	27	27	27	25.8	25	22	22	21											
	Imposition (min)*	23	25	25	21.5	20.1	17.3	-	-											

\* Category 6 according IEC 61156-5

\*\* For information only

## NORMS AND STANDARDS

### GENERAL



Applications

IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T; 2,5G Base-T,  
 IEEE 802.3 af (PoE) / 802.3 at (PoE+)  
 IEEE 802.5 / FDDI / ATM / RNIS

Cables

IEC 61156-5 ed.2 / EN 50288-6-1

Cabling system standard

ISO/IEC 11801 2nd ed. / EN 50173-1 / TIA-568.2-D

Cabling system installation standards

EN 50174

Directive / Regulation

RoHS 2011/65/UE

REACH 1907/2006/EC

## EUROCLASS



## FIRE BEHAVIOUR

Europe

Type	Euroclass	Standards	Declaration of performance
4P	Dca-s2,d2,a2	IEC 60332-1	<a href="#">17UUTP010</a>

Hors Europe

No flame propagation	IEC 60332-1 / EN 60332-1
Low smoke opacity	IEC 61034-2 / EN 61034-2
Low gas corrosivity	IEC 60754-2 / EN 60754-2
Low toxicity	IEC 60754-1 / EN 60754-1

# RECOMMENDATIONS

## DELIVERY LENGTH

Type	References	Individual			Expedition		
		Type	Weight	EAN code	Quantity	Weight	EAN code
4P LSOH-FR	R7560A - ST1000	Drums of 1000 m	35 kg	3700223695911	18 drums	652 kg	3700223695904
	R7560A - ST4000	Drums of 4000 m	146 kg	3700223695911	1 drums	164 kg	3700223695935