

## TR / SP-121

LSOH screen multi-paired cables for digital transmissions 5/10 - TR/SP-121


### BENEFITS

- ACOME's TR/SP-121 series cables have been used for decades in fixed Telecom networks in France, Africa and the Middle East.
- From the outset, these cables have satisfied the highest quality transmission requirements. They still provide very high speed transmission for ADSL, ADSL2+ and VDSL protocols of Internet Service Providers (ISPs).

### APPLICATIONS

- TR/SP-121 series cables are individually shielded twisted pair installation cables for digital transmissions.
- They are used to connect transmission equipment to the switch.
- These cables have fibre counts of 1, 8 and 16 pairs with 5/10 conductors. They are fitted with a beige ZHT sheath.
- They provide high-speed data transmission up to 2Mbit/s.

### GENERAL CHARACTERISTICS

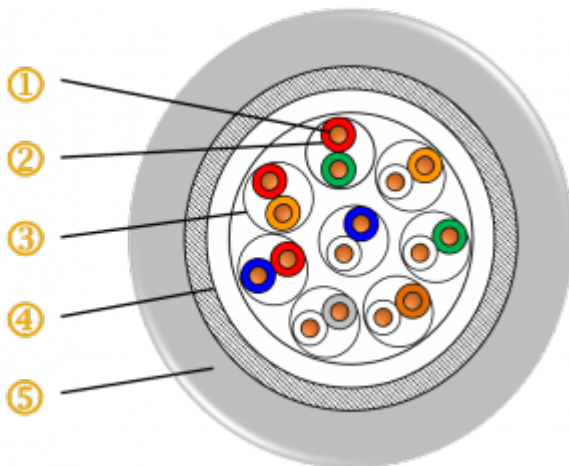

1. Conductor: Red copper wire
2. Insulation: Double layer polyethylene
3. Assembly: Pairs
4. Pair shielding: Tinned copper continuity wire / Numbered aluminium tape
5. General shielding: Tinned copper continuity wire / Double-sided polyester aluminium tape (except 1 p.: SF) / Tinned copper braid
6. Protection: ZHT sheath beige RAL1015

## General

Item code	Range	Assembly	Number of pairs	Diameter of the conductor	Marking	Colour code
R7375A	TR/SP-121	Pairs	13 p.		ACOME	Std
R7378A	TR/SP-121	Pairs	20 p.		ACOME	Std
R7379A	TR/SP-121	Pairs	16 p.		ACOME	Std

## Color code

## Tableau des codes couleurs

Paires	Couleur du fil isolé	
	Fil 1	Fil 2
1	Blanc	Bleu
2	Blanc	Orange
3	Blanc	Vert
4	Blanc	Marron
5	Blanc	Gris
6	Rouge	Bleu
7	Rouge	Orange
8	Rouge	Vert
9	Rouge	Marron
10	Rouge	Gris
11	Noir	Bleu
12	Noir	Orange
13	Noir	Vert
14	Noir	Marron
15	Noir	Gris
16	Jaune	Bleu

# NORMS AND STANDARDS

## General

ROHS 2002/95/CE